

Wavelet Segmentation for Fetal Ultrasound Images

Nourhan M. Zayed, B.Sc., Ahmed M. Badwi*, Ph.D., Alaa Elsayad, Ph.D.,
Mohamed S. Elsherif, Ph.D., Abou-Bakr M. Youssef*, M.D.,

Department of Computer Science, Electronics Research Institute;
*Department of Systems & Biomedical Engineering, Cairo University

Abstract – *This paper introduces an efficient algorithm for segmentation of fetal ultrasound images using the multiresolution analysis technique. The proposed algorithm decomposes the input image into a multiresolution space using the B-spline two-dimensional wavelet transform. The system builds features vector for each pixel that contains information about the gray level, moments and other texture information. These vectors are used as inputs for the fuzzy c-means clustering method, which results in a segmented image whose regions are distinct from each other according to texture characteristic content. An Adaptive Center Weighted Median filter is used to enhance fetal ultrasound images before wavelet decomposition. Experiments indicate that this method can be applied with promising results. Preliminary experiments indicate good results in image segmentation while further studies are needed to investigate the potential of wavelet analysis and fuzzy c-means clustering methods as a tool for detecting fetus organs in digital ultrasound images.*

Keywords: *Medical image processing; Wavelet; Fuzzy c-means clustering.*

I. INTRODUCTION

Pulsed-echo ultrasound is a non-invasive technique that able to visualize an internal structure of soft tissues. It is considered to be an extremely important and valuable tool for medical diagnosis [1]. Ultrasound has gained wide spread use in the evaluation of fetal development. In case of fetal ultrasound, the examiners evaluate the length of the body and head, the movement of the limbs, and the detection of the different congenital disease kinds. Generally ultrasound images often have a marked textural appearance. Therefore the segmentation of these images is an essential component of computer-assisted diagnosis system. The purpose of such systems always is to detect the boundaries of different organs from the diagnostic ultrasound images [2].

Several texture segmentation algorithms based on extracting features from wavelet transform domain have been

proposed recently [3]. In [4] a criterion that utilizes ratio of the mean energy in the four low-frequency channels to that in three middle-frequency channels is suggested to distinguish smooth images from textured images. In [5], [6] a multiple scale approach is introduced and the performance of wavelet packet is investigated. The authors conclude that multiresolution properties of wavelet transforms are useful for applications such as segmentation, classification, and discrimination of textures. Porter [7] proposes an automatic scheme, which can select the optimal features using wavelet analysis. In another work, wavelet packet representations at multiple scales are used as the texture signature, and appropriate features extracted from wavelet decompositions are measured [8]. Based on this information, classification can then be performed. Actually, despite the effort, texture analysis is still considered difficult problem in image processing.

In this research, we implement multiresolution wavelet transform for texture segmentation application using The B-spline mother wavelet in the decomposition process [9]. The texture information is extracted using statistic parameters from the multiresolution framework. The fuzzy c-means [10] classifier is employed for the clustering process. This process results a segmented image whose regions are distinct from one another with respect to texture characteristic content. Fig. 1 shows the structure of the proposed segmentation schema of fetal images.

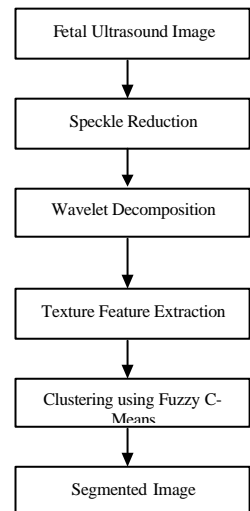


Fig. 1. Block diagram of the proposed segmentation algorithm

II. ULTRASOUND SPECKLE REDUCTION

Ultrasound Speckle is a phenomenon that occurs when a coherent imaging system is used to image a surface that is

rough on the scale of the wavelength used. Speckle is often modeled as a multiplicative process [11], because fully developed speckle has the property of constant signal to noise ratio. An Adaptive Center Weighted Median filter (*ACWM*) is used to enhance fetal ultrasound images in the first step.

ACWM is non-linear image smoothing and enhancement technique. It is effective at reducing both signal dependent and random noise. Several researchers have experimented with adaptive median and order statistic filters [12], [13],[14]. *ACWM* filter varies the center's weight from one point to the next by a technique designed to distinguish noise from detail. When the center's pixel in the window is deemed to be more likely to be noise than signal we want to lean towards outputting the median, conversly we want the output biased towards the identity filter when we've got signal. Fig.2(a) shows a fetal ultrasound image, Fig.2(b) is the image filtered by *ACWM*.

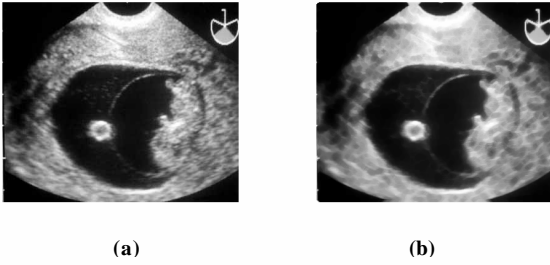


Fig.2. (a) Original fetal ultrasound image. (b) Result after filtering by 9x9 adaptive weighted median filter.

III. WAVELET MULTIREOLUTION ANALYSIS

The wavelet transform decomposes the fetal ultrasound image into a multiresolution representation, which consists of the low frequency approximation information and the high frequency detailed information. The reader is referred to references such as [15], [16] for details of the two-dimensional orthogonal wavelet transform. Given fetal ultrasound image, the multiresolution representation is generated by successive filtering using quadrature mirror filter [8]. Successive filtering of textured images can be thought as dynamically focusing on the important region of the frequency domain for the particular texture in the image. Fig 3 shows the subband of the 2-D orthogonal wavelet transform of fetal image.

The b-spline mother wavelet is considered to be the mother wavelet of the decomposition algorithm. It possesses some desirable properties such as being well localized in time and frequency, and being compactly supported. Thus it allows to

derive localized contributions of energy to the textured signal in well separated frequency channels.

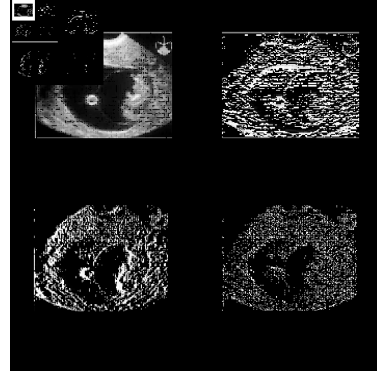


Fig. 3. The subband of the 2-D orthogonal wavelet transform of fetal image.

IV. FUZZY C-MEANS CLUSTERING

The two-dimensional discrete wavelet transform with B-spline basis are used to decompose images into four frequency bands of LL, LH, HL, and HH. At the lowest level of decomposition, feature vectors based on the fuzzy c-means clustering algorithm are formed from HL, HH or LH, HH subbands. These high frequency subbands tend to amplify corresponding horizontal, vertical, and diagonal edges. Discrimination and classification of textures are implemented based on the reduced data set. Obviously, the benefit of this step is the direct reduction of computational complexity for the rest processing.

The fuzzy C-means clustering algorithm is applied for grouping together those pixels in the image, which have similar features in the feature space. The fuzzy C-means algorithm is based on minimization of the following objective function, with respect to U , a fuzzy K -partition of the data set, and to V , a set of K prototypes:

$$J_q(U, V) = \sum_{j=1}^N \sum_{i=1}^K ((u_{ij})^q \cdot d^2(X_j, V_i)) ; \quad K \leq N \quad (1)$$

where q is the weighting exponent for u_{ij} and controls the "fuzziness" of the resulting clusters, and it is any real number greater than 1, X_j is the j th m -dimensional feature vector, V_i is the centroid of the i th cluster, u_{ij} is the degree of membership of X_j in the i th cluster, $d^2(X_j, V_i)$ is any inner

product metric (distance between X_j and V_i), N is the number of data points, and K is number of clusters.

V. DATASET

10 ultrasound images for different ages of fetus have been segmented with the proposed algorithm. The system was implemented in VC++ on a windows 98 platform on PC PIII. Three radiologists have tested the performance of the system. Experimental results demonstrate that the proposed technique is giving a comparable results to other technique.

VI. EXPERIMENTAL RESULTS

The preliminary testing of the proposed system was based on the digital ultrasound images shown in Fig. 4(a) and Fig. 4(b). These images are for 9 weeks and 22 weeks respectively.

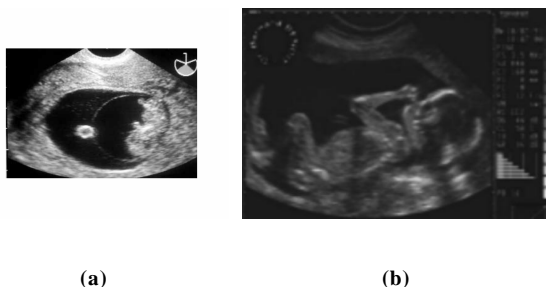


Fig.4. (a) Image 1 fetal ultrasound image 9 weeks. (b) Image 2 Original fetal ultrasound image 22 weeks.

These images are segmented using two methods: 1) fuzzy c-mean based on pixel gray level, 2) fuzzy c-mean based on fuzzy c-means based on texture feature, both methods in time domain and in wavelet domain. Fig. 5(a), 5(b) show the results for segmentation using the first method in time domain and in wavelet domain respectively for the original image Fig. 4(a). Also, Fig. 5(c), 5(d) The segmentation results for the original image in Fig 4(b). The second method results are demonstrated in Fig. 6(a), 6(b) for the first image, also Fig. 6(c), 6(d) for the second image. In wavelet-based method the original image is decomposed using BSpline wavelet transform. Then feature vector is built in the wavelet domain for every pixel that contains: mean, variance and one of the percentile. The fuzzy c-means clustering method segmented the image based on these information. Results shows that the method based on wavelet representation gives better segmentation results. The segmented fetus after the wavelet transform is more accurate than the the method based on gray level information only. Moreover the results of wavelet-based segmentation method gives less noise segmented image.

VII. CONCLUSION

Previous studies suggested that wavelet-based image analysis techniques could occupy a leading position in medical imaging. the proposed approach to segment fetus ultrasound image was motivated by the ability of wavelets to discriminate different frequencies and to preserve signal details at different resolutions. However, the performance of the wavelet is affected by : 1) the properties of the wavelet filters used for subband image decomposition, 2) the intensity contrast between the background and tissue information, 3) the resolution of the original digital ultrasound image, 4) artifacts exist in the original images. This paper presented a novel method combining wavelet analysis and fuzzy c-means clustering method.

This work has focused on the algorithmic development and experimental justification.. more thorough theoretical analysis is expected in the future. The application of the wavelet transform to fetus segmentation is under our current investigation.

REFERENCES

- [1] G.Kossof, "Display Techniques in Ultrasound Pulse Echo Investigations," in *1974 JCU*.
- [2] Seward, J.B., M.Belohlavek, P.wO'Leary, D.AFoley, and J.F.Greenleaf: "Congenital Heart Disease: Wide field, Three Dimensional, And Four Dimensional Ultrasound Imaging," *American Journal of cardiac imaging* 9(1): 38-43, January 1995.
- [3] Gert Van De Wouwer, "Wavelet Multiscale Texture Analysis," *University Instelling Antwerpen (PHD thesis), in 1998*.
- [4] C. Gonzalez, P. Wintz, "Digital Image Processing," 2nd edition Wesley, in 1987.
- [5] Charles K.Chui, "Wavelets: A Mathematical Tool for Signal Analysis," *Society for Industrial and Applied Mathematics, in 1997*.
- [6] L.Prasad and S.S.Iyengar, "Wavelet Analysis with Applications to Image Processing," *CRS Press, in 1997*.
- [7] R.Porter, N.Canagarajah, "A Robust Automatic Clustering scheme for Image Segmentation using Wavelet," *IEEE Transaction on Image Processing* 5(4): 662-65, in 1996.
- [8] M.Unser, A Aldroubi, and M Eden, "A Family of Polynomial Spline Wavelet Transforms," *Signal Processing, vol.30, no.2, pp. 141-162, in 1993*.
- [9] Micheal Farmer, "Automatic Segmentation of Medical Images using Fuzzy C-Means Clustering, Oriented Edges, and a Recurrent competitive Field Neural Network," *University of Teeneese at Chattanooga, in June 1996*.

- [10] M. Tur, K.C.Chin, and J.W.Goodman, "When is Speckle Noise Multiplicative?, " *Applied Optics*, vol.2.no.7, pp. 1157-1159, in April 1982.
- [11] T.S.Lim, "Two Dimensional Signal and Image Processing," *Prentic Hall, Engle wood cliffs, NJ*, in 1990.
- [12] A.C. Bovik, T.S.Huang,and D.C.Munson, Jr., "A Generalization of Median Filtering using Linear Combinations of Order Statistics," *IEEE Transaction on Acoustics, Speech and Signal Processing*, vd. ASSp-31, no.6, pp. 1342-1350, in December 1983.
- [13] J. C. Bamber, and C. Daft, "Adaptive filtering for reduction of Speckle in Ultrasonic Pulse-Echo images," *Ultrasonics*, vol. 24, no. 1, pp. 41-44, in January 1986.
- [14] J.-L.Starck, F.Murtagh and A.Bijaoui, "Image Processing and Data Analysis The Multi Scale Approach," in 1998 *Cambridge University Press*.
- [15] S. Mallat,"A Theory for Multiscale Signal Decomposition: the Wavelet Representation," *IEEE Transaction on Pattern and machine intelligence*, 11(7): 674-693, in 1989.
- [16] Tianhorng Chang and C-C. Jay Kuo , "Texture Analysis and Classification with Tree_Structured Wavelet Transform," *IEEE Transaction on Image Processing*, vol2 ,no. 40, in October1993.

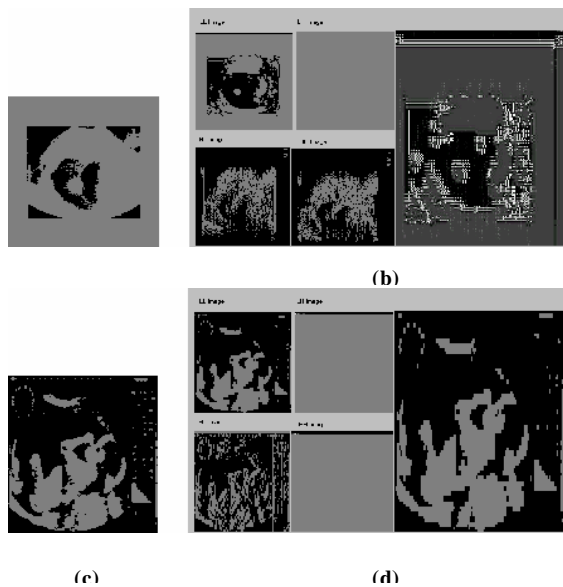


Fig. 5. (a) Result after segmentation using Fuzzy C-Means technique based on pixels gray level for original image 1. (b) Resulted LL, LH, HL, HH, and reconstructed image 1 (by sizing) after segmentation using Fuzzy C-Means technique based on pixels gray level. (c) Result after segmentation using Fuzzy C-Means technique based on pixels gray level for original image 2. (d) Resulted LL, LH, HL, HH, and reconstructed image 2 (by sizing) after segmentation using Fuzzy C-Means technique based on pixels gray level.

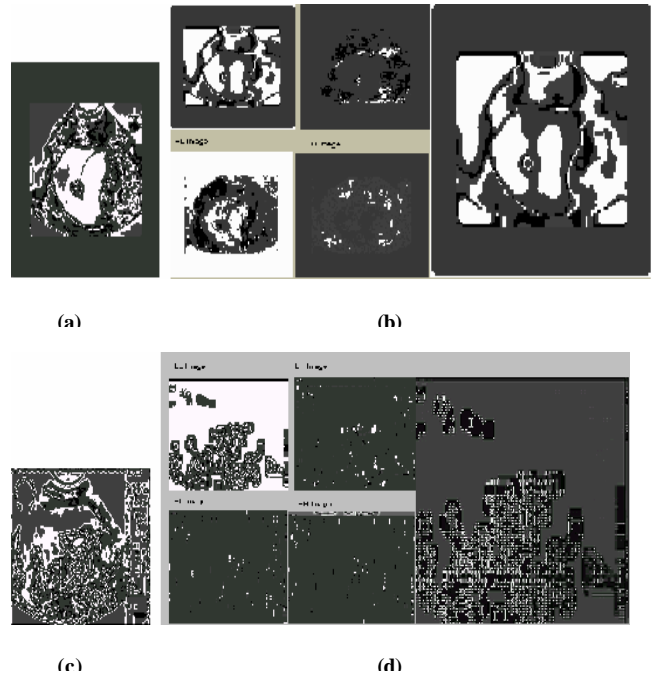


Fig. 6. (a) Result after segmentation using Fuzzy C-Means technique based on mean, variance, and percentile 30 texture feature vector for original image 1. (b) Resulted LL, LH, HL, HH, and reconstructed image 1 (by sizing) after segmentation using Fuzzy C-Means technique mean texture feature. (c) Result after segmentation using Fuzzy C-Means technique based on mean, variance, and percentile 30 texture feature vector for original image 2. (d) Resulted LL, LH, HL, HH, and reconstructed image 2 (by sizing) after segmentation using Fuzzy C-Means technique based on mean, variance, and percentile 30 texture feature vector.